


d1	d2	L mm *	SW mm *
1/4"	1/8"	15,0/16,0	15,0/16,5
3/8"	1/8"	16,5/16,0	18,0/21,8
	1/4"	16,5/18,5	18,0/21,8
1/2"	1/8"	20,0/20,0	23,0/25,5
	3/8"	20,0/20,0	23,0/25,5
3/4"	1/8"	21,5/25,0	29,0/31,5
	1/4"	21,5/25,0	29,0/31,5
	3/8"	21,5/25,0	29,0/31,5
1"	1/2"	21,5/25,0	29,0/31,5
	1/8"	24,5/30,5	35,0/38,0
	1/4"	24,5/30,5	35,0/38,0
	3/8"	24,5/30,5	35,0/38,0
1 1/4"	1/2"	24,5/30,5	35,0/38,0
	3/4"	24,5/30,5	35,0/38,0
	3/8"	27,5/31,5	45,0/46,0
	1/2"	27,5/31,5	45,0/46,0
1 1/2"	3/4"	27,5/31,5	45,0/46,0
	1"	27,5/31,5	45,0/46,0
	1/2"	30,0/33,5	50,0/51,8
2"	3/4"	30,0/33,5	50,0/51,8
	1"	30,0/33,5	50,0/51,8
	1 1/4"	30,0/33,5	50,0/51,8
	1 1/2"	30,0/33,5	50,0/51,8
2 1/2"	1/2"	33,5/34,0	62,0/62,5
	3/4"	33,5/34,0	62,0/62,5
	1"	33,5/34,0	62,0/62,5
	1 1/4"	33,5/34,0	62,0/62,5
3"	1 1/2"	33,5/34,0	62,0/62,5
	1/2"	39,5/42,0	78,0/79,5
	3/4"	39,5/42,0	78,0/79,5
	1"	39,5/42,0	78,0/79,5
4"	1 1/4"	39,5/42,0	78,0/79,5
	1 1/2"	39,5/42,0	78,0/79,5
	2"	39,5/42,0	78,0/79,5
	1"	40,0/42,0	91,0/94,5
3"	1 1/4"	40,0/42,0	91,0/94,5
	1 1/2"	40,0/42,0	91,0/94,5
	2"	40,0/42,0	91,0/94,5
4"	2 1/2"	40,0/42,0	91,0/94,5
	1 1/2"	44,5/45,0	117,0/118,0
	2"	44,5/45,0	117,0/118,0
4"	2 1/2"	44,5/45,0	117,0/118,0
	3"	44,5/45,0	117,0/118,0

325 Redukcja gwint zewnętrzny / wewnętrzny

Wykonanie: odlew ze stali 316 [1.4408]
lub 304 [1.4308]. EN10241:2000 [DIN2990].
Gwint BSP wg ISO 228-1G [wewn]
oraz ISO 7-1R [zewn].

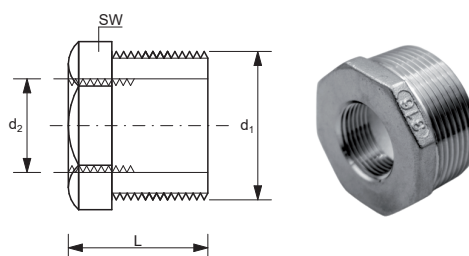

Większe wymiary jako 8-kątna

* - w celu potwierdzenia wymiarów, prosimy o kontakt z działem handlowym.