


### 326 Zaślepka sześciokątna gwint wewnętrzny

Wykonanie: odlew ze stali 316 [1.4408]  
lub 304 [1.4308]. EN10241:2000 [DIN2991].  
Gwint BSP wg ISO 228-1G.

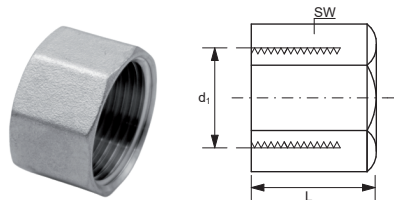

DN	d1	L mm *	SW mm *
6	1/8"	15,5/13,5	14,2/13,5
8	1/4"	17,0/18,5	17,5/16,8
10	3/8"	17,5/19,5	21,2/20,2
15	1/2"	20,0/21,1	25,5/24,6
20	3/4"	20,4/21,7	30,1/30,1
25	1"	27,1/24,8	37,4/37,5
32	1 1/4"	30,0/26,5	47,0/46,7
40	1 1/2"	30,3/30,0	53,2/53,0
50	2"	32,3/34,2	66,0/65,7
65	2 1/2"	35,2/38,7	81,0/80,5
80	3"	38,4/42,5	95,8/96,0
100	4"	41,0/48,4	122,2/123,3

Większe wymiary jako 8-kątna