


335 Mufa redukująca gwint wewnętrzny

Wykonanie: odlew ze stali 316 [1.4408].
EN10241:2000 [DIN2981].
Gwint BSP wg ISO 228-1G.

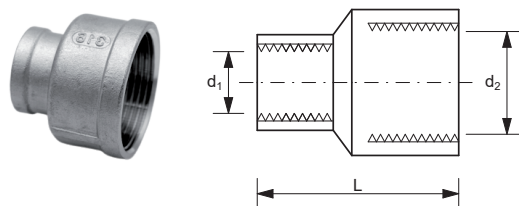

d1	d2	L mm *
1/4"	1/8"	24,0/25,0
3/8"	1/8"	29,0/26,0
	1/4"	29,0/26,0
1/2"	1/8"	34,0/34,0
	1/4"	34,0/34,0
3/4"	3/8"	34,5/34,0
	1/4"	34,5/36,0
	3/8"	36,5/36,0
1"	1/2"	36,5/36,0
	1/4"	40,0/42,0
	3/8"	41,5/42,0
1 1/4"	1/2"	42,0/42,0
	3/4"	41,5/42,0
	1/4"	42,0/48,0
1 1/2"	3/8"	42,0/48,0
	1/2"	46,0/48,0
	3/4"	46,0/48,0
2"	1"	47,0/48,0
	3/8"	43,5/52,0
	1/2"	47,0/52,0
	3/4"	47,5/52,0
2 1/2"	1"	50,0/52,0
	1 1/4"	51,5/52,0
	1/2"	51,0/58,0
	3/4"	55,0/58,0
	1"	55,0/58,0
3"	1 1/4"	59,0/58,0
	1 1/2"	59,0/58,0
	1"	59,5/65,0
3 1/2"	1 1/4"	59,5/65,0
	1 1/2"	61,0/65,0
	2"	61,0/65,0
4"	1 1/4"	65,5/72,0
	1 1/2"	65,0/72,0
	2"	65,0/72,0
4 1/2"	2 1/2"	70,5/72,0
	2"	66,0/94,0
	2 1/2"	71,0/94,0
5"	3"	77,0/94,0