

## Trójniki V-spawane równoramienne

Trójnik spawane równoramienne [produkowane z rur, V spawane].


Wykonane zgodnie z ISO 5251, EN10253-3 lub EN10253-4 z rur spawanych zgodnie z EN 10217-7 [DIN 17457].

Współczynnik spawu V=1,0. Atest wg EN10204 3.1.

### DOSTĘPNE GATUNKI

1.4301/1.4307

1.4404

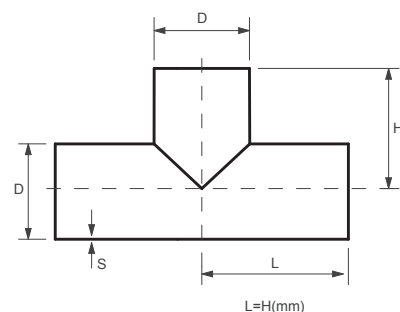

D [MM]	S [MM]	L [MM]	WAGA [KG]	D [MM]	S [MM]	L [MM]	WAGA [KG]
254,0	2,0	250,0/216,0	7,20		5,0	305,0	37,6
256,0	3,0	250,0/216,0	9,00	408,0	4,0	400,0/305,0	30,2
273,0	2,0	216,0	7,00	410,0	5,0	305,0	37,6
	3,0	216,0	10,7	456,0	3,0	400,0/343,0	31,2
	4,0	216,0	14,2	457,2	3,0	343,0	31,2
304,0	2,0	300,0/254,0	9,70		4,0	343,0	39,0
306,0	3,0	300,0/254,0	15,3		5,0	343,0	48,5
323,9	2,0	254,0	9,70	458,0	4,0	450,0/343,0	39,0
	3,0	254,0	15,3	506,0	3,0	500,0/381,0	36,0
	4,0	254,0	19,5	508,0	3,0	381,0	36,0
	5,0	254,0	25,7		4,0	381,0	48,0
354,0	2,0	350,0	15,0		5,0	381,0	60,0
355,6	2,0	279,0	11,3		6,0	381,0	72,0
	3,0	279,0	17,6	510,0	5,0	381,0	60,0
	4,0	279,0	21,9	606,0	3,0	432,0	52,0
	5,0	279,0	30,9	608,0	4,0	432,0	69,0
356,0	3,0	350,0/279,0	17,6	609,6	3,0	432,0	52,0
358,0	4,0	279,0	21,9		4,0	432,0	69,0
360,0	5,0	279,0	30,9		5,0	432,0	86,0
406,0	3,0	400,0/305,0	24,2		6,0	432,0	104,0
406,4	3,0	305,0	24,2	610,0	5,0	432,0	86,0
	4,0	305,0	30,3		6,0	432,0	104,0