


**Kołnierze szyjkowe wg ASME B16.5 150lbs**

DOSTĘPNE GATUNKI			
Szeroki wybór		Ograniczony wybór	
304L	1.4541	1.4462	1.4435
316L	1.4571	1.4539	

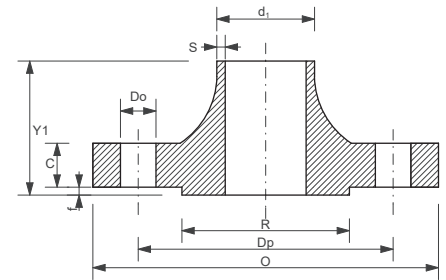

f=2,0mm

DN	CALE	GRUBOŚĆ	RURA		KOŁNIERZ					ŚRUBY			WAGA [KG]
			d <sub>1</sub> [MM]	O [MM]	C [MM]	Dp [MM]	Y1 [MM]	s [MM]	R [MM]	liczba	gwint [MM]	Do [MM]	
15	1/2"	10S	21,3	90	9,6	60,3	46	2,11	34,9	4	12,7	15,9	0,51
		40S STD						2,77					
		80S XS						3,73					
20	3/4"	10S	26,7	100	11,2	69,9	51	2,11	42,9	4	12,7	15,9	0,73
		40S STD						2,87					
		80S XS						3,91					
25	1"	10S	33,4	110	12,7	79,4	54	2,77	50,8	4	12,7	15,9	1,07
		40S STD						3,38					
		80S XS						4,55					
32	1 1/4"	10S	42,2	115	14,3	88,9	56	2,77	63,5	4	12,7	15,9	1,40
		40S STD						3,56					
40	1 1/2"	10S	48,3	125	15,9	98,4	60	2,77	73,0	4	12,7	15,9	1,81
		40S STD						3,68					
		80S XS						5,08					
50	2"	10S	60,3	150	17,5	120,7	62	2,77	92,1	4	15,9	19,1	2,59
		40S STD						3,91					
		80S XS						5,54					
65	2 1/2"	10S	73,1	180	20,7	139,7	68	3,05	104,8	4	15,9	19,1	4,28
		40S STD						5,16					
80	3"	10S	88,9	190	22,3	152,4	68	3,05	127,0	4	15,9	19,1	5,18
		40S STD						5,49					
		80S XS						7,62					
100	4"	10S	101,6	215	22,3	177,8	70	3,05	139,7	8	15,9	19,1	5,45
		40S STD						5,74					
		80S XS						8,08					
125	5"	10S	114,3	230	22,3	190,5	75	3,05	157,2	8	15,9	19,1	7,32
		40S STD						6,02					
		80S XS						8,56					
150	6"	10S	141,3	255	22,3	215,9	87	3,40	185,7	8	15,9	22,2	8,91
		40S STD						6,55					
		80S XS						11,0					
200	8"	10S	168,3	280	23,9	241,3	87	3,40	215,9	8	19,0	22,2	11,3
		40S STD						7,11					
		80S XS						11,0					
250	10"	10S	219,1	345	27	298,5	100	3,76	269,9	8	19,0	22,2	17,7
		40S STD						8,18					
		80S XS						12,7					
300	12"	10S	273	405	28,6	362,0	100	4,19	323,8	12	19,0	25,4	24,8
		40S STD						9,27					
		80S XS						12,7					
350	14"	10S	323,9	485	30,2	431,8	113	4,57	381,0	12	22,2	25,4	39,0
		40S STD						9,53					
		80S XS						14,0					
400	16"	10S	355,6	535	33,4	476,3	125	4,78	412,8	12	22,2	28,6	51,7
		40S STD						9,53					
		80S XS						14,0					
450	18"	10S	406,4	595	35	539,8	125	4,78	469,9	16	25,4	28,6	64,4
		40S STD						9,53					
		80S XS						14,0					
500	20"	10S	457,1	635	38,1	577,9	138	4,78	533,4	16	25,4	31,8	74,8
		40S STD						9,53					
		80S XS						14,0					
600	24"	10S	508	700	41,3	635,0	143	5,54	584,2	20	28,6	31,8	89,4
		40S STD						9,52					
		80S XS						14,0					
600	24"	10S	609,6	815	46,1	749,3	151	6,35	692,2	20	28,6	34,9	120
		40S STD						9,52					
		80S XS						14,0					