


**Kołnierze szybkowe wg ASME B16.5 300lbs**

DOSTĘPNE GATUNKI			
Szeroki wybór		Ograniczony wybór	
304L	1.4541	1.4462	1.4435
316L	1.4571	1.4539	

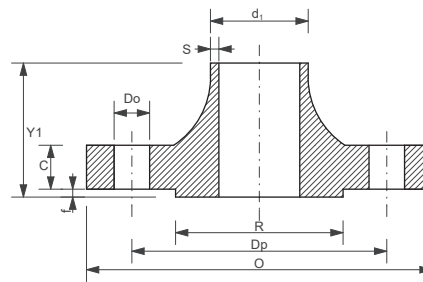

DN	CALE	GRUBOŚĆ	RURA		KOŁNIERZ					ŚRUBY			WAGA [KG]
			d <sub>1</sub> [MM]	O [MM]	C [MM]	Dp [MM]	Y1 [MM]	s [MM]	R [MM]	liczba	gwint [MM]	Do [MM]	
15	1/2"	10S	21,3	95	12,7	66,7	51	2,11	34,9	4	12,7	15,9	0,78
		40S STD						2,77					
		80S XS						3,73					
		160						4,78					
20	3/4"	10S	26,7	115	14,3	82,6	56	2,11	42,9	4	15,9	19,1	1,34
		40S STD						2,87					
		80S XS						3,91					
		160						5,56					
25	1"	10S	33,4	125	15,9	88,9	60	2,77	50,8	4	15,9	19,1	1,64
		40S STD						3,38					
32	1 1/4"	10S	42,2	135	17,5	98,4	64	4,55	63,5	4	15,9	19,1	2,06
		40S STD						3,56					
40	1 1/2"	10S	48,3	155	19,1	114,3	67	2,77	73,0	4	19,0	22,2	3,06
		40S STD						3,68					
50	2"	10S	60,3	165	20,7	127,0	68	5,08	92,1	8	19,0	19,1	3,4
		40S STD						2,77					
		80S XS						3,91					
65	2 1/2"	10S	73,1	190	23,9	149,2	75	5,54	104,8	8	19,0	22,2	5,31
		40S STD						5,16					
80	3"	10S	88,9	210	27,0	168,3	78	7,01	127,0	8	19,0	22,2	7,32
		40S STD						3,05					
		80S XS						5,49					
100	4"	10S	101,6	230	28,6	184,2	79	7,62	139,7	8	19,0	22,2	8,17
		40S STD						3,05					
		80S XS						5,74					
125	5"	10S	114,3	225	30,2	200,0	84	8,08	157,2	8	19,0	22,2	11,3
		40S STD						3,05					
		80S XS						6,02					
150	6"	10S	141,3	280	33,4	235,0	97	8,56	185,7	8	19,0	22,2	15,1
		40S STD						3,40					
		80S XS						7,11					
200	8"	10S	168,3	320	35,0	269,9	97	11,0	215,9	12	19,0	22,2	19,7
		40S STD						3,76					
		80S XS						8,18					
250	10"	10S	219,1	380	39,7	330,2	110	12,7	269,9	12	22,2	25,4	30,5
		20 S						4,19					
		40S STD						6,35					
		80S XS						9,27					
300	12"	10S	273,0	445	46,1	387,4	116	12,7	323,8	16	25,4	28,6	43,7
		40S STD						4,57					
350	14"	10S	323,9	520	49,3	450,8	129	12,7	381,0	16	28,6	31,8	64,4
		40S STD						9,52					
400	16"	10S	355,6	585	52,4	514,4	141	12,7	412,8	20	28,6	31,8	88,3
		40S STD						9,52					
450	18"	10S	406,4	650	55,6	571,5	144	12,7	469,9	20	31,7	34,9	113
		40S STD						9,52					
500	20"	10S	457,2	710	58,8	628,6	157	12,7	533,4	24	31,7	34,9	138
		40S STD						9,52					
600	24"	10S	508,0	775	62,0	685,8	160	12,7	584,2	24	31,7	34,9	167
		40S STD						9,52					
		10S	609,6	915	68,3	812,8	167	12,7	692,2	24	38,1	41,3	235
		40S STD						9,52					
		80S XS						12,7					