


Kołnierze szyjkowe wg ASME B16.5 600lbs

DOSTĘPNE GATUNKI			
Szeroki wybór		Ograniczony wybór	
304L	1.4541	1.4462	1.4435
316L	1.4571	1.4539	

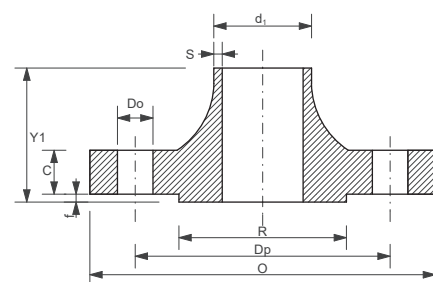

f=7,0mm

DN	CALE	GRUBOŚĆ	RURA	KOŁNIERZ						ŚRUBY			WAGA [KG]
			d ₁ [MM]	O [MM]	C [MM]	Dp [MM]	Y1 [MM]	s [MM]	R [MM]	liczba	gwint [MM]	Do [MM]	
15	1/2"	40S	21,3	95	14,3	66,7	52	2,77	34,9	4	12,7	15,9	0,90
		80S						3,73					
20	3/4"	40S	26,7	115	15,9	82,6	57	2,87	42,9	4	15,9	19,1	1,59
		80S						3,91					
25	1"	10S	33,4	125	17,5	88,9	62	2,77	50,8	4	15,9	19,1	1,90
		40S						3,38					
		80S XS						4,55					
32	1 1/4"	10S	42,2	135	20,7	98,4	67	2,77	63,5	4	15,9	19,1	2,49
40	1 1/2"	40S	48,3	155	22,3	114,3	70	3,68	73,0	4	19,0	22,2	3,93
		80S XS						5,08					
50	2"	10S	60,3	165	25,4	127,0	73	2,77	92,1	8	15,9	19,1	4,54
		40S						3,91					
		80S XS						5,54					
65	2 1/2"	10S	73,1	190	28,6	149,2	79	3,05	104,8	8	19,0	22,2	6,35
		40S STD						5,49					
80	3"	80S XS	88,9	210	31,8	168,3	83	7,62	127,0	8	19,0	22,2	8,10
		40S						5,74					
100	4"	80S XS	101,6	230	35,0	184,2	86	8,08	139,7	8	22,2	25,4	11,8
		40S						6,02					
125	5"	80S XS	141,3	330	44,5	266,7	114	8,56	157,2	8	22,2	25,4	16,8
		40S						6,55					
150	6"	80S XS	168,3	355	47,7	292,1	117	9,52	215,9	12	25,4	28,6	30,9
		40S						7,11					
200	8"	80S XS	219,1	420	55,6	349,2	133	11,0	269,9	12	28,6	31,8	50,8
		40S						8,18					
250	10"	80S XS	273,0	510	63,5	431,8	152	12,7	323,8	16	31,7	34,9	86,3
		40S						9,27					
300	12"	80S XS	323,9	560	66,7	489,0	156	12,7	381,0	20	31,7	34,9	103
		40S						9,52					
350	14"	-	355,6	605	69,9	527,0	165	-	412,8	20	34,9	38,1	122
400	16"	-	406,4	685	76,2	603,2	178	-	469,9	20	38,1	41,3	177
450	18"	-	457,1	745	82,6	654,0	184	-	533,4	20	41,3	44,5	216
500	20"	-	508,0	815	88,9	723,9	190	-	584,2	24	41,3	44,5	268
600	24"	-	609,6	940	101,6	838,2	203	-	692,2	24	28,6	50,8	372